


HIGHLIGHTS

- Provides two digital over-the-air (OTA) tuners.
- Provides a Channel 3-4 Modulated Output.

APPLICABLE RECEIVERS

- ViP® 222k
- ViP® 722k DVR

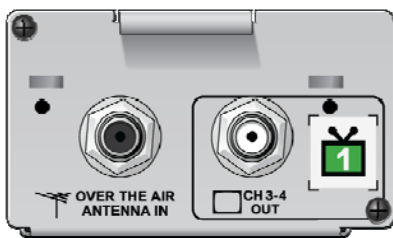

OTA MT2 Module

DESCRIPTION

- The MT2 Over-the-Air Module provides compatible receivers with two digital OTA tuners (OVER THE AIR ANTENNA IN port).
 - OTA programs are integrated into the Program Guide for seamless viewing.
 - Live OTA programming can be viewed from both TV1 and TV2 locations.
 - Digital video recording (DVR) receivers can record two digital OTA broadcasts.
- The Channel 3-4 Modulated Output (CH 3-4 OUT) is available for viewing TV1 content on a standard definition TV.

CONSIDERATIONS

- The Module is an optional accessory.
- An OTA antenna must be installed to use the Module.
- Satellite signal and a DISH Network programming subscription is required to operate the Module.

CONSIDERATIONS, continued

- The Module is installed in the port on the left side of the receiver's back panel.
- Installation is simple—follow the instructions provided with the Module.
- OTA channels must be scanned into the receiver after installing the module.
- Guide information for OTA channels will display only if the customer subscribes to DISH Network local channels.
- Selection of Channel 3 or 4 (TV1 out) is made within the receiver's Modulator Setup screen.

FOR MORE INFORMATION

Review the Over-the-Air Module Installation Instructions.



MT2 OTA Module Partially Inserted into Receiver